

## The Installation and Application of FTTH-FTB104C




### 1. Introduction of production:


FTB104C is made of high quality engineering plastic, with beautiful and elegant appearance; it is usually installed at outdoor walls. The reasonable inner structure makes the operation and installation easy and convenient. The MAX capacity is 4, the splice tray adopts a diversified structure. It can be used to install 1:4 PLC dividers, or splice cable using the method of heated pipe, also can connect cable using the method of cold subgroups. The installation frame is at the bottom of the adapter, which makes the product beautiful and steady, and the application more flexible.

### 2. Operation steps

1, Strip the cable, lead the cable through the cable incoming hole to the splice tray through the fiber core fixed plate,

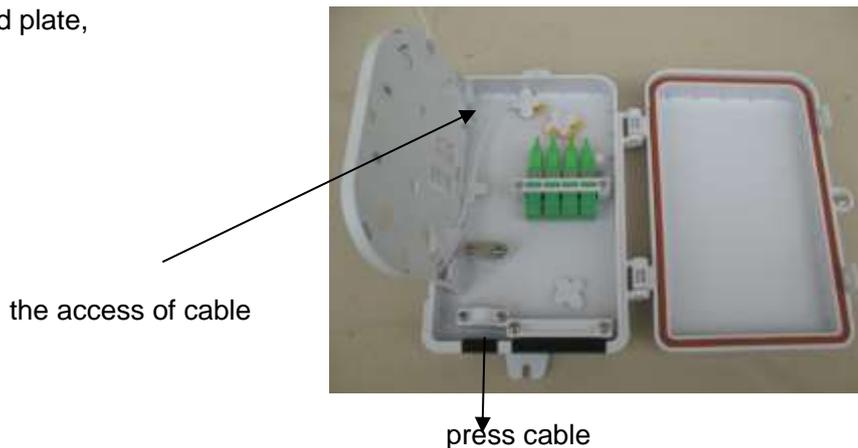

2, Introduce the cable from the bottom of the splice tray to joint with the pigtails, then splice them, please twist the rest of the pigtails well with the cable. Splice as usual, then put the splice protective tube into the slot of tray.

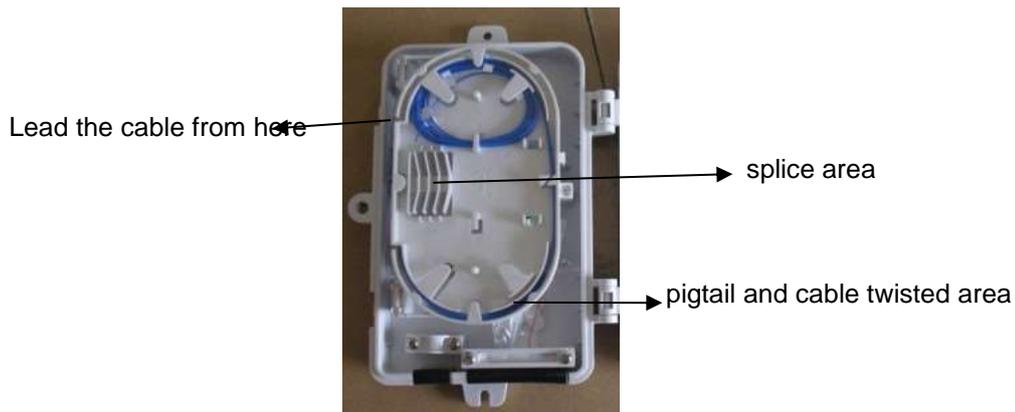

3, Pull out the cable from the hole, cover and lock it.



4, find a proper position, fix it on the wall with expansion screws

### 3. Specification

type	FTB104C
size (mm)W*D*H	210*140*40
cable diameter(mm)	Φ7~Φ10
cable ports.	1+4
MAX capacity	4(simplesx)
Capacity of splice tray	65

### Packing information

carton (unit)	60
Out package size(mm)	460*460*540
Out package volume(M <sup>3</sup> )	0.115
Out package weight (kg)	21.4