

SFP+ Direct Attach Active Copper Cables (5m, 7m, 10m, 12m)

Description

SFP+ active cable assemblies are high performance, cost effective I/O solutions for 10Gb Ethernet and 10G Fiber Channel applications. SFP+ copper modules allow hardware manufactures to achieve high port density, configurability and utilization at a very low cast and reduced power budget. The high speed cable assemblies meet and exceed Gigabit Ethernet and Fiber Channel industry standard Page 2 of 4 5 /2014 requirements for performance and reliability.

Features


- Support for multi-gigabit data rates up to 10 Gb/s
- Data rates backward compatible to 1 Gb/s
- Hot-pluggable SFP 20PIN footprint
- Improved Pluggable Form Factor(IPF) compliant for enhanced EMI/EMC performance
- Low Power Consumption < 0.2W
- Power Supply :+3.3V
- Compatible to SFP+ MSA
- Compatible to SFF-8431,SFF8432
- Temperature Range: 0~ 70 °C
- RoHS Compatible

Applications

- High capacity I/O in Storage Area Networks, Network Attached Storage, and Storage Servers
- Switched fabric I/O such as ultra high bandwidth switches and routers
- Data center cabling infrastructure
- High density connections between networking equipment

Mechanical Dimensions



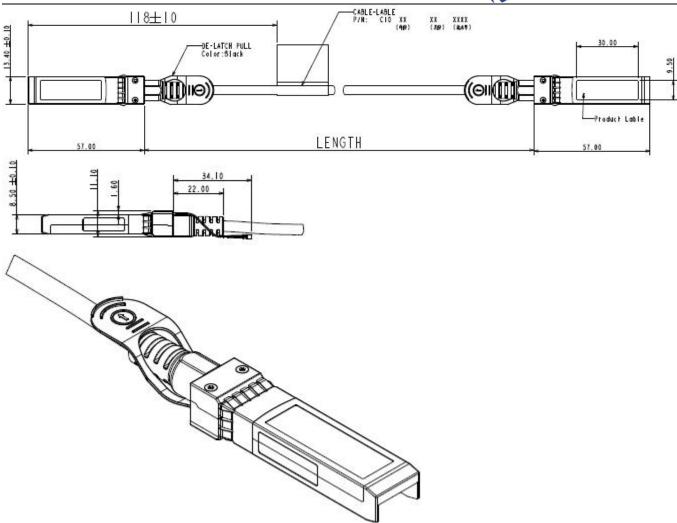

2